

ステンレスユニットシェルフ 追加用ワイヤーバスケット スチールユニットシェルフ 追加用ワイヤーバスケット

幅84cmタイプ / 幅56cmタイプ用

STEEL UNIT SHELF / ADDITIONAL WIRE BASKET
STAINLESS UNIT SHELF / ADDITIONAL WIRE BASKET

FOR W56 cm TYPE / W84 cm TYPE

組立・取扱説明書 User Guide

日本語

この度は本製品をお買い上げいただき、誠にありがとうございます。
1ページからお読みください。

English

Thank you for your purchase.
Read these instructions from Page 11.

4550182141221 STAINLESS UNIT SHELF / ADDITIONAL WIRE BASKET FOR W84 cm TYPE
4550182141238 STAINLESS UNIT SHELF / ADDITIONAL WIRE BASKET FOR W56 cm TYPE
4550182141245 STEEL UNIT SHELF / ADDITIONAL WIRE BASKET / LIGHT GREY FOR W84 cm TYPE
4550182141252 STEEL UNIT SHELF / ADDITIONAL WIRE BASKET / LIGHT GREY FOR W56 cm TYPE

2023 / 11 / 16

ステンレスユニットシェルフ 追加用ワイヤーバスケット スチールユニットシェルフ 追加用ワイヤーバスケット

幅84cmタイプ / 幅56cmタイプ用

組立・取扱説明書

この度は本製品をお買い上げいただき、誠にありがとうございます。
ご使用前に本書をよくお読みいただき、内容を理解した上で、正しく組み立て、正しくお使いください。
また、本書はいつでも確認できるように大切に保管してください。

もくじ	ページ
重要なお知らせ（安全上のご注意）	2 ～ 3
パーツリスト	4
各部の名称	4
組立方法	5 ～ 7
ご使用方法	8 ～ 10
お手入れ方法	10
製品仕様	11
お問い合わせ先	11

重要なお知らせ（安全上のご注意）

必ずお守りください。

本書には、お使いになる方や他の人への危害と財産への損害を未然に防ぎ、安全に正しくお使いいただくために、重要な内容を記載しています。

次の内容（表示・図記号）をよく理解してから本文をお読みになり、記載事項をお守りください。

●表示の説明

誤った使い方をしたときに生じる危害や損害の程度を区分して説明しています。



警告

使用者が死亡または重傷（※1）を負うことが想定される内容です。



注意

使用者が傷害（※2）を負うことや物的損害（※3）が発生することが想定される内容です。

●図記号の説明

お守りいただく内容を次の図記号で説明しています。（次は図記号の例です。）



してはいけない「禁止」の内容です。



実行しなければならない内容です。

※1 重傷とは、失明やケガ、やけど、骨折、中毒、感電などで後遺症が残るもの及び治療に入院、長期の通院を要するものをさします。

※2 傷害とは、治療や入院や長期の通院を要しない、ケガ、やけどをさします。

※3 物的損害とは、家屋、家財にかかわる拡大損害をさします。



警告



禁止

- お子さまに製品に登る、ぶら下がるなどさせないでください。転倒や破損、ケガをするおそれがあります。
- 製品の上部だけに片寄って収納しないでください。バランスがくずれて倒れ、ケガをするおそれがあります。
- 上部に重たい物は置かないでください。地震などで物が落ちたり、本体ごと倒れたりして、ケガをするおそれがあります。
- 耐荷重を超えて物をのせたり、耐荷重内でも一部に片寄ってのせたりしないでください。変形や破損の原因となり、ケガをするおそれがあります。
- 不要になった梱包材は、幼児の手の届くところに置かないでください。頭からかぶるなどしたときに、口や鼻をふさぎ、窒息するおそれがあります。
- フィッティングパーツは幼児の手の届くところには置かないでください。また、なくさないでください。これらは小さく、誤飲してしまうと窒息などのおそれがあります。




注意



禁止

- 組み立てが不完全なまま使用しないでください。固定部分がはずれてケガの原因になることがあります。
- 指定の用途以外で使用しないでください。破損してケガをするおそれがあります。
- 屋外では使用しないでください。変形や著しい劣化が起こり、ケガをする原因となります。

! 注意	
 行う	<ul style="list-style-type: none"> ● 組み立ては、大人2人以上で行ってください。1人で作業すると、転倒や破損、ケガをしたり、床をキズつける原因となります。 ● (組み立てた製品を) 移動させる際は、大人2人以上で、必ず製品の下に両手を掛け、床面を引きずらないように持ち上げて運んでください。床や既存の家具のキズ防止になります。 ● (引越される場合) 移動をする際は、組み立て前の状態に戻してから運んでください。途中でパーツがはずれると、破損、ケガをするおそれがあります。 ● バスケット開閉時、手や指が可動部や隙間に触れないようにしてください。はさまれてケガをするおそれがあります。 ● 各部にゆるみがないか定期的に点検し、ゆるんでいたらしっかり締め直してください。ケガや製品の破損防止になります。 ● バスケットの取りはずしや取り付けは、中の衣類や収納物を全て出してから行ってください。収納物が入ったまま取りはずそうとすると、破損したり、収納物が落下してケガをするおそれがあります。 ● 平らで安定した場所に設置してください。不安定な場所での使用は、製品のゆがみ、破損の原因になることがあります。 ● ユニットシェルフ(※)に付属の組立・取扱説明書をよく読み正しくお使いください。組み立てた製品に対し、お使いになる上での注意が記載されており、ケガを防ぎ、安全にお使いいただくために重要です。

※ステンレスユニットシェルフシリーズ、スチールユニットシェルフシリーズの帆立・棚板・クロスバー単品あるいはセットになった製品。

お願い (その他 注意)	
	<ul style="list-style-type: none"> ● 開封後の梱包材は、居住地域の自治体のルールに従い、処分してください。 ● 組み立ての際は、手袋などをつけて作業してください。思わぬケガの防止になります。

パーツリスト

幅56cm

幅84cm

共通/

スチール






ステンレス

共通

※パーツリストは、**スチール** **ステンレス** ともに共通です。

※イラストには、**幅56cm** を使用しています。

※ドライバーは付属されていません。適切なサイズのプラスドライバーをご用意ください。
(ドライバーの先端が大きすぎたり、小さすぎると組み立てが難しい場合があります。)
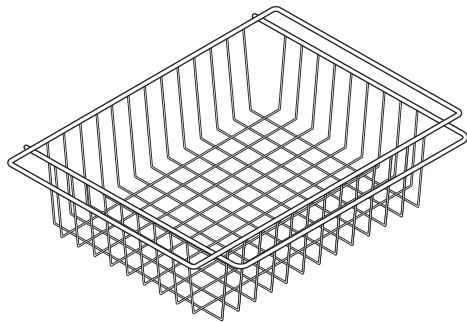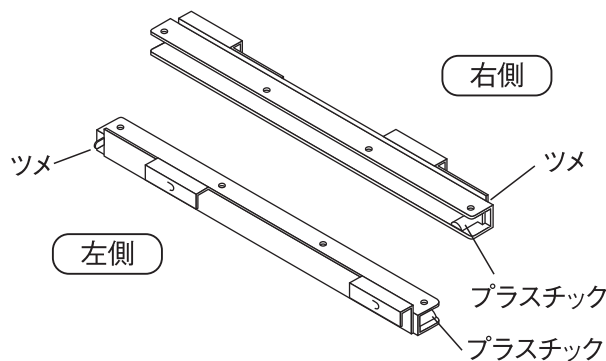
<p>①ワイヤーバスケット×1</p> 	<p>②サイドレール×2</p> 	
<p>フィッティングパーツ</p>		
<p>③スライド用チューブ×2</p> 	<p>④ストッパーピン×4</p> 	<p>⑤跳ね上げ防止ボルト×4 ※②サイドレールに取り付けてあります。</p> 

各部の名称

組み合わせ例

帆立小+スチール棚板(幅56cmタイプ)+クロスバー
※帆立、スチール棚板、クロスバーは別売りです。

②サイドレール

②サイドレール

①ワイヤーバスケット

完成図 (例)

組立方法

幅56cm

幅84cm

共通/

スチール

ステンレス

共通




注意

- ❗ 組み立ては、大人2人以上で行ってください。1人で作業すると、転倒や破損、ケガをしたり、床をキズつける原因となります。
- ❌ 組み立てには電動工具は使用しないでください。無理な負荷がかかると、製品破損によりケガをするおそれがあります。
- ❗ 組み立て後、1週間程度経過しましたら、ボルトを締め直してください。使い始めはゆるんでいる場合があり、そのまま使用すると破損、ケガの原因となります。

※ユニットシェルフ全体の組み立て手順については、棚セットもしくは追加用帆立（単品）に付属の組立・取扱説明書をよく読み正しく組み立ててください。

1

- ② サイドレールに取り付けてある③ 跳ね上げ防止ボルトを全て取りはずします。
（※取りはずしたパーツは手順 4 で使用します。）

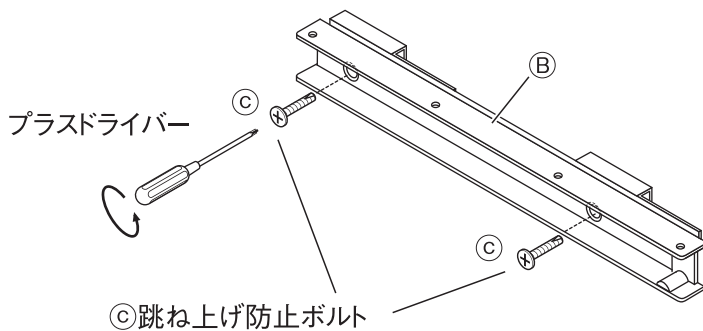


お願い
(その他 注意)

棚板の下にワイヤーバスケットを取り付ける場合は、棚板を一度取りはずしてください。

2

- 帆立の横棧に② サイドレールのツメを帆立柱の内側にあてがうようにしてから、コの字側を内側に向けて上からはめ込むようにして取り付けてください。多少きつめになっていますので、上から軽くたたくようにしてください。

※② サイドレールには左右がありますので下図を参考に見分けてください。

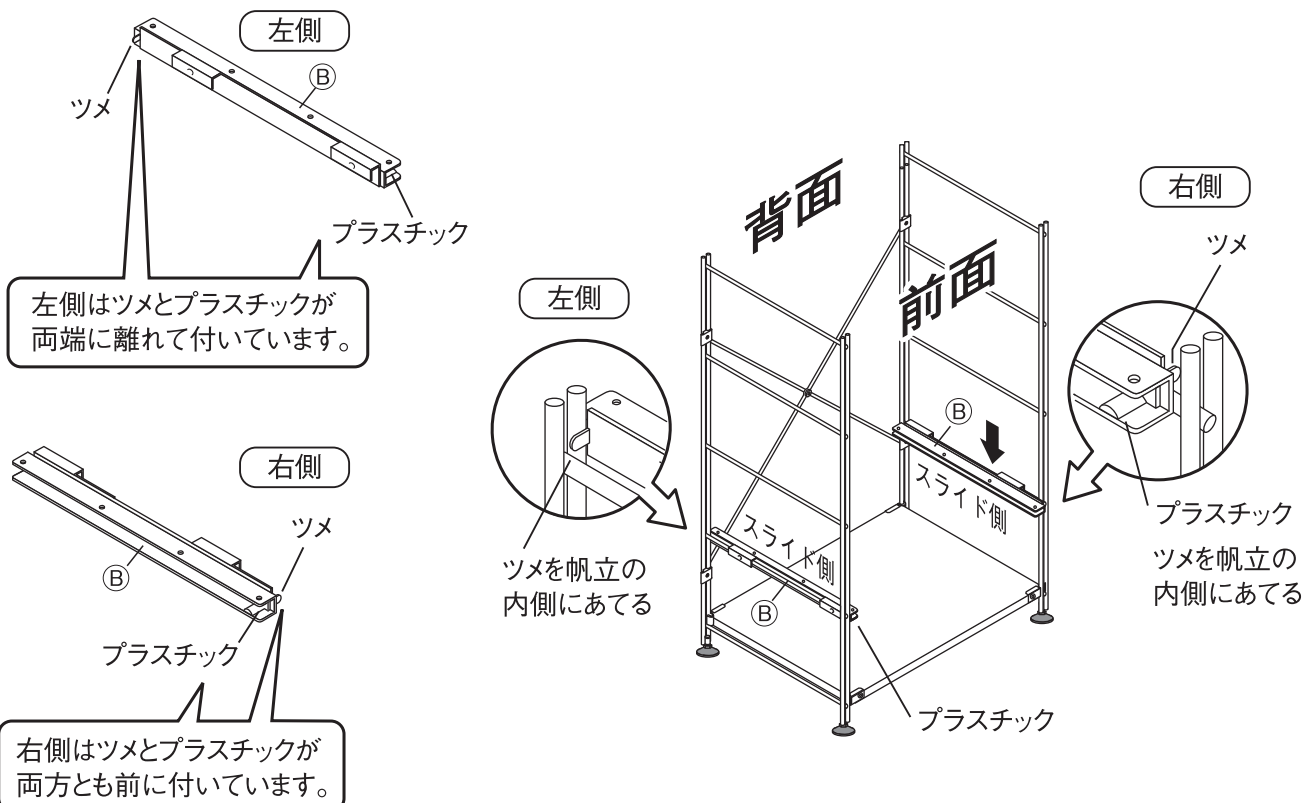

※イラストには、幅56cmを使用しています。

組立方法（つづき）

幅56cm

幅84cm

共通/


スチール

ステンレス


共通

3

③スライド用チューブを①ワイヤーバスケットの下図の位置に取り付けてください。

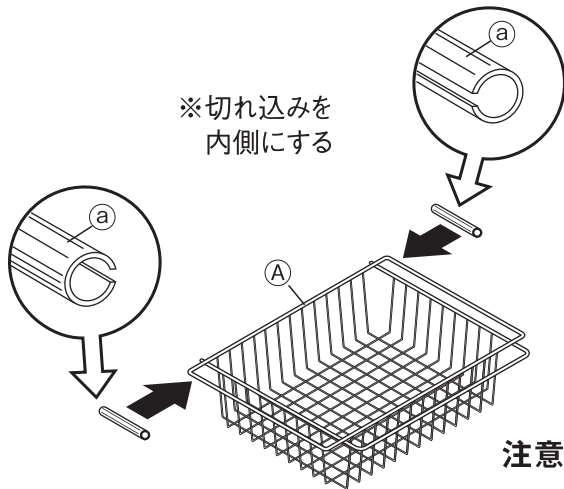

※③スライド用チューブは必ず①ワイヤーバスケットの奥側の両サイドに取り付けてください。

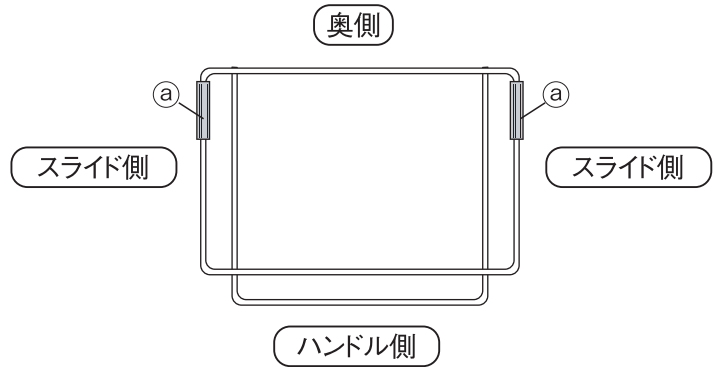


お願い
(その他 注意)


③スライド用チューブは冷たくなっていると硬化してワイヤーにはめ込む際に、割れてしまうおそれがあります。冬季中の配送やお持ち帰り直後は冷たくなっている場合がありますので、チューブは部屋の中で30分程放置してからのはめ込んでください。

4

帆立の横栈に取り付けた②サイドレールに、手順 1 で取りはずした③跳ね上げ防止ボルトを取り付けます。

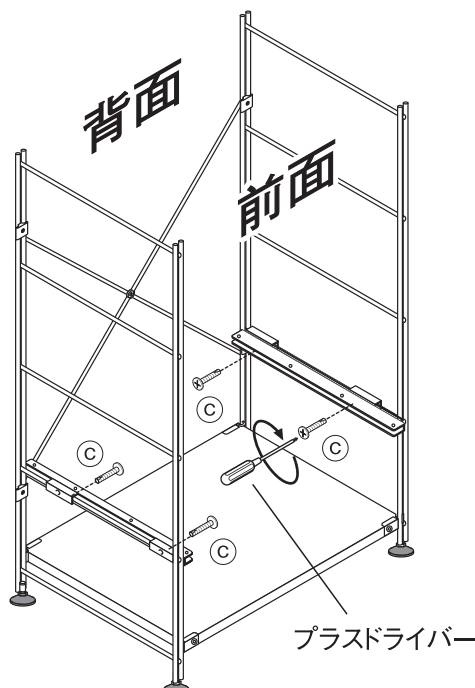

③跳ね上げ防止ボルト取り付け位置

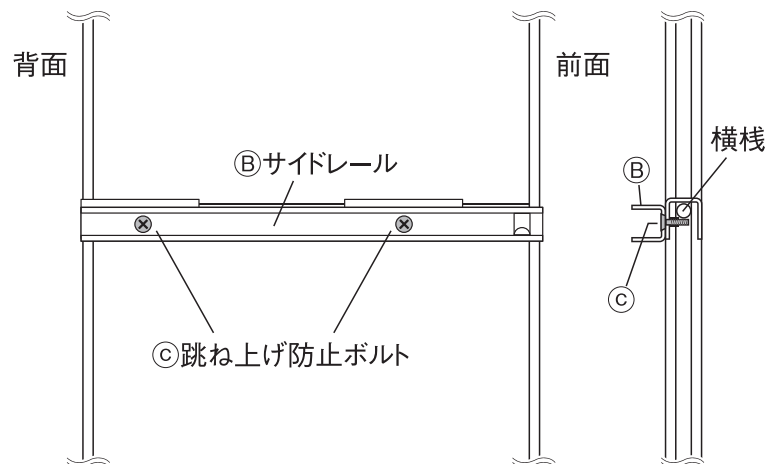

注意

❗ ③跳ね上げ防止ボルトは②サイドレールと段差が無くなるまで、しっかりと締めてください。ボルトの頭が出ていると、ワイヤーバスケットの開閉がしにくくなる原因となります。

※イラストには、幅56cm を使用しています。

組立方法（つづき）

幅56cm

幅84cm

共通/


スチール

ステンレス


共通

5

⑥ストッパーピンを⑦サイドレールの1番奥の穴に左右とも差し込みます。
次に手順③で組み立てた④ワイヤーバスケットを差し込みます。

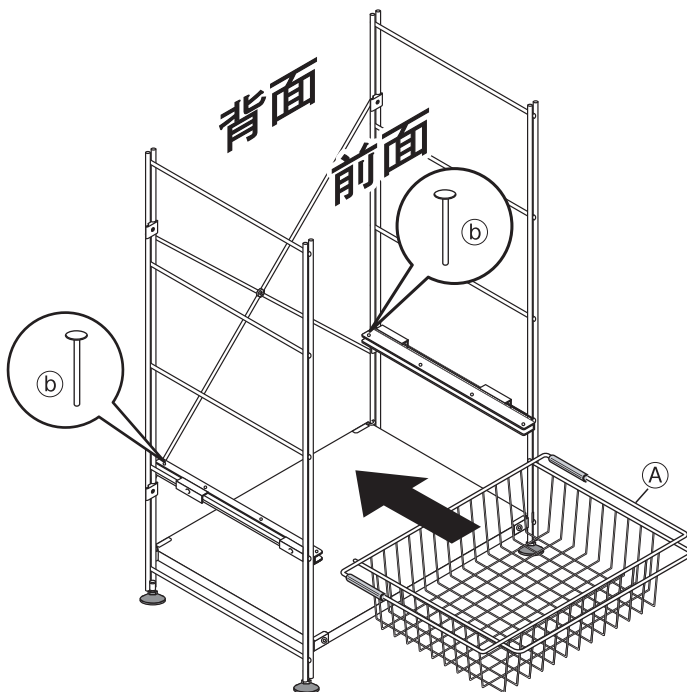


⑥ストッパーピン取り付け位置

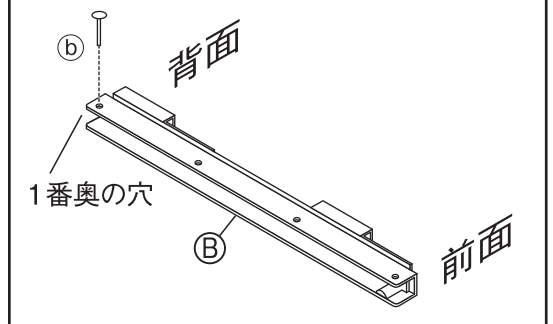


6

④ワイヤーバスケットをセットしたら⑥ストッパーピンを⑦サイドレールの奥から3番目の穴に左右とも差し込みます。
棚板がある場合は、棚板を取り付けます。

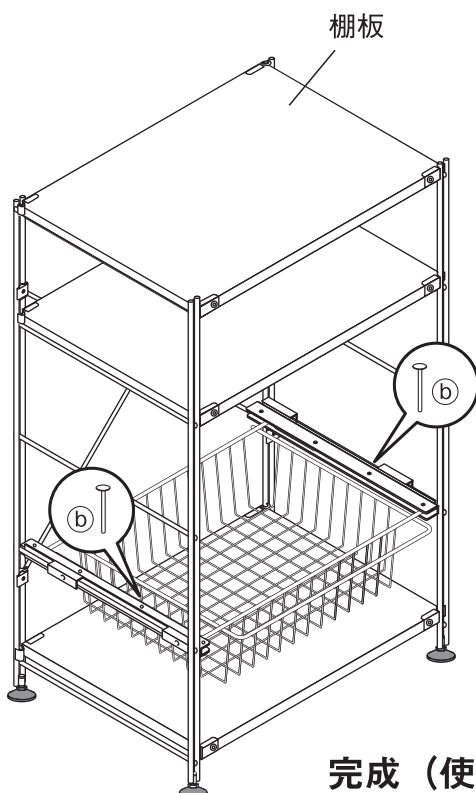

⑥ストッパーピン取り付け位置

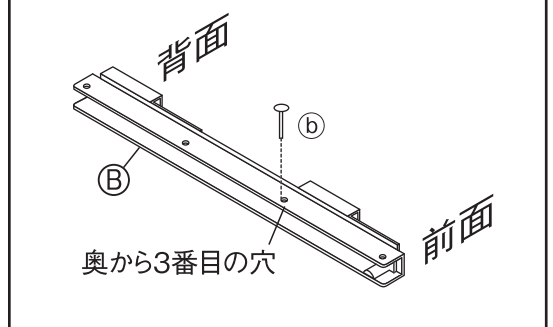

完成（使用例）

ご使用方法

幅56cm

幅84cm

共通/

スチール


ステンレス

共通

お願い(その他 注意)


①ワイヤーバスケットの差し込み方

- ① 左右の帆立を外側に広げながら下図のように①ワイヤーバスケットを②サイドレールに差し込みます。
その際スライド用チューブがずれたり、はずれたりする場合がありますので、必ずスライド用チューブの部分を持つようにしてください。

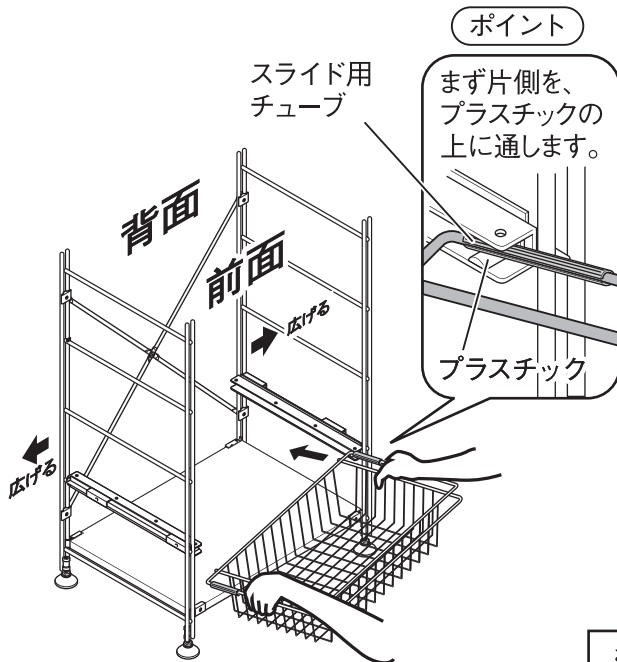

※①ワイヤーバスケットが差し込みにくい場合は、下図のようにして差し込んでください。


- ② 下図のように左右のスライド用チューブの部分を手でにぎって、外側のワイヤーが少し内側に反るようにして、①ワイヤーバスケットを左右交互に差し込んでいきます。

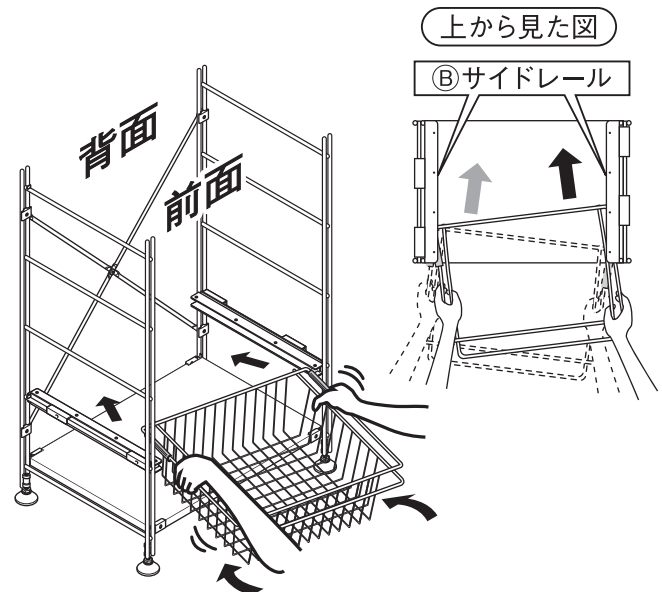

※上記の方法で差し込みにくい場合は、全ての棚板のフックをゆるめてから①、②の工程を行ってください。


①ワイヤーバスケットの取り出し方

- ① 前面側の②ストッパーピンを取りはずします。

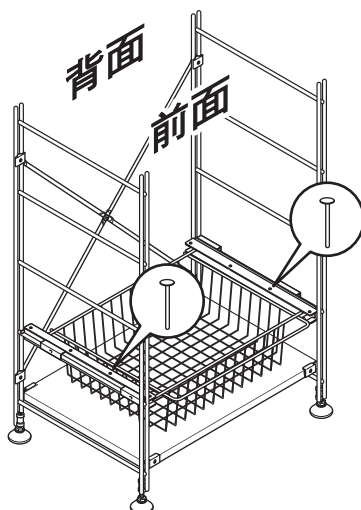

※①ワイヤーバスケットを取り出す際は、下図のようにして取り出してください。

- ② フレームを手でにぎって、外側のワイヤーを少し内側に反るようにして、①ワイヤーバスケットを左右交互にふりながら、引っ張り出します。

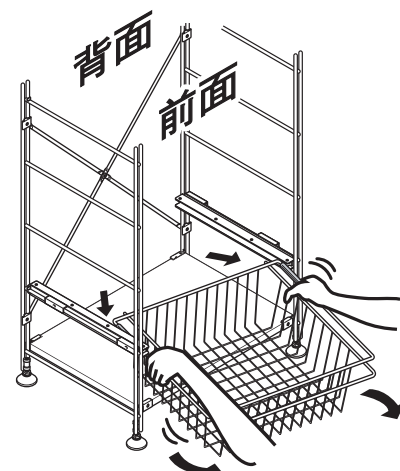

ご使用方法 (つづき)

幅56cm

幅84cm

共通/

スチール


ステンレス

共通

お願い (その他 注意)


組み立て上のご注意

- ①ワイヤーバスケットの開閉がきつい場合は、つぎの手順で調整を行ってください。

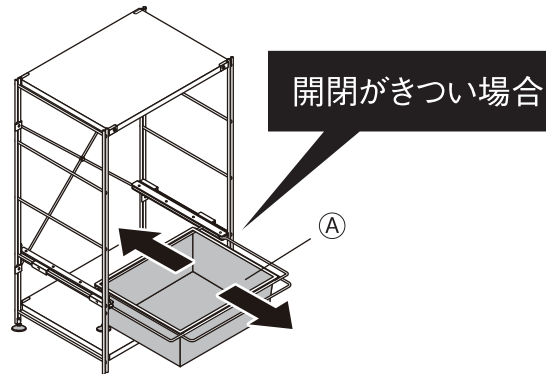


調整方法

- 1 上部から順番に、棚板のフックのボルトを、すべて六角レンチで少しゆるめます。

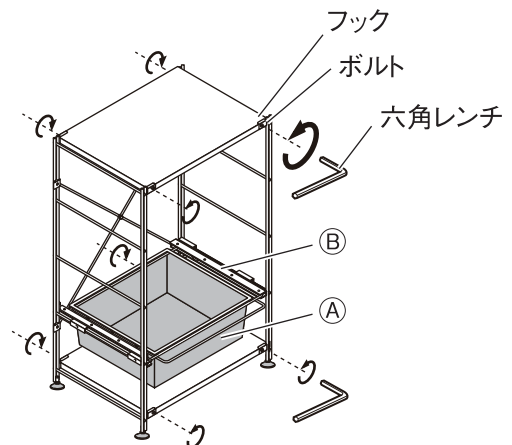

- 2 全体のバランスを確認しながら、棚板のフック位置を調整してください。①ワイヤーバスケットの開閉がスムーズになるような位置が確認出来たら、ゆるめたフックのボルトを再度締め直してください。

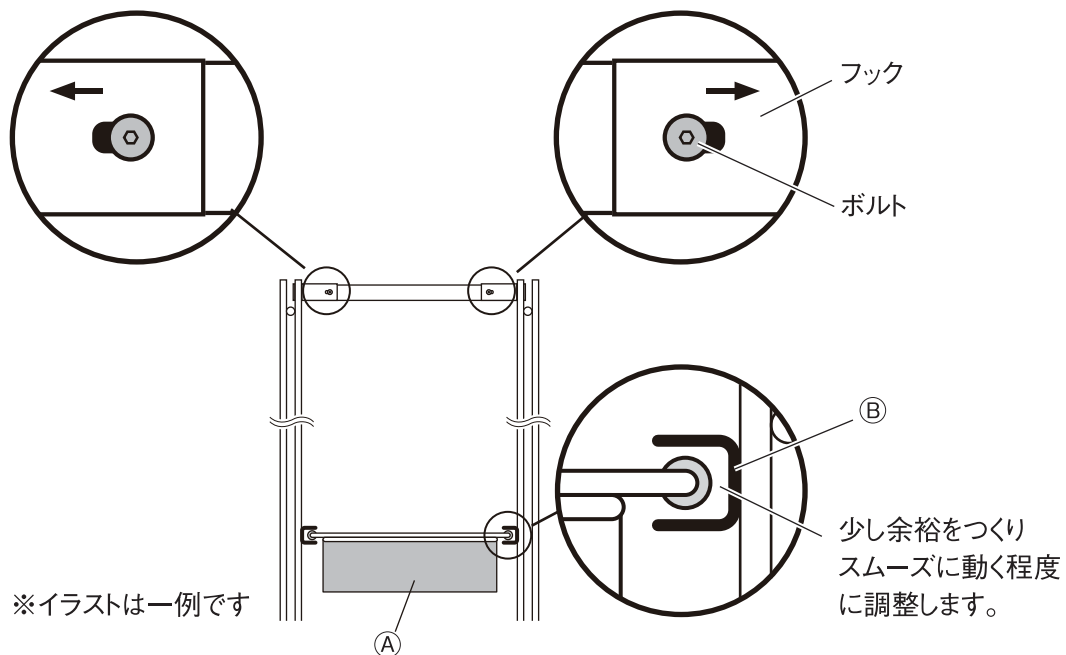


ご使用方法（つづき）

移動について


〈組み立てた状態で動かす場合〉

- 物をのせたまま棚板を持ち上げないでください。収納物が破損、ケガをするおそれがあります。
- 移動させる際は、収納物を取り除き、大人2人以上で移動させてください。1人で無理に移動させると、破損、ケガをするおそれがあります。
- 製品を床面で引きずったり、押したりしないでください。床をキズつけたり、製品破損の原因になることがあります。

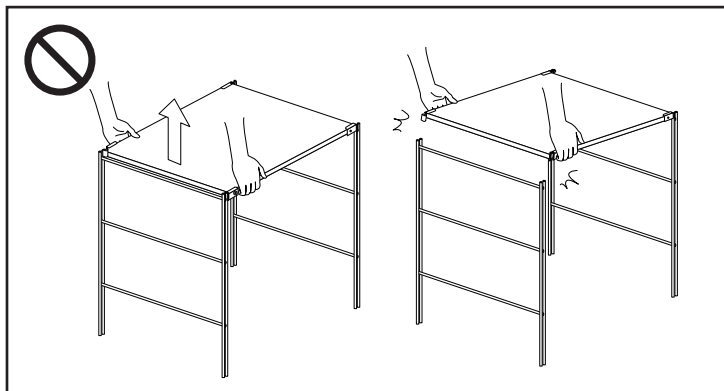

〈引越しなどで運ぶ場合〉

- 移動をする際は、組み立て前の状態に戻してから運んでください。ケガや製品の破損、床面がキズがつくおそれがあります。

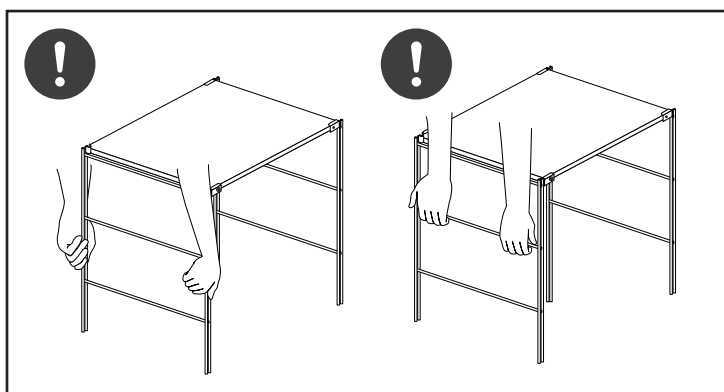

廃棄について

- 廃棄の際は、居住地域の自治体のルールに従い、処分してください。

お手入れ方法

保守・点検

- 破損や変形した状態では使用しないでください。製品の強度が弱くなりケガをするおそれがあります。
- 取り付け部にゆるみやグラつきがないか定期的に点検し、ゆるんでいたらしっかり締め直してください。ケガや製品の破損、床面へのキズ防止になります。

金属部のお手入れ

- 通常のお手入れは、やわらかい布で乾ぶきしてください。ほこりなどはブラシや掃除機（弱設定）などで取り除いてください。
- 汚れのひどい時は、3～5%に薄めた中性洗剤を浸した布で汚れを落とし、その後、水で浸した布で洗剤分をよくふき取ってください。次に乾いた布で軽くふいた後、自然乾燥させてください。

製品仕様

品 名	ステンレスユニットシェルフ・ ステンレス追加用ワイヤーバスケット		スチールユニットシェルフ・ 追加用ワイヤーバスケット・ライトグレー	
規 格	幅84cmタイプ用	幅56cmタイプ用	幅84cmタイプ用	幅56cmタイプ用
J A N	4550182141221	4550182141238	4550182141245	4550182141252
製品寸法	幅790×奥行410 ×高さ143 mm	幅510×奥行410 ×高さ143 mm	幅790×奥行410 ×高さ143 mm	幅510×奥行410 ×高さ143 mm
製品質量	約3 kg	約2 kg	約3 kg	約2 kg
用 途	ステンレスユニットシェルフ、スチールユニットシェルフ用追加パーツ			
耐 荷 重	約5 kg			
材 質	バスケット部 : 金属(ステンレス鋼)/電解研磨 サイドレール部: 金属(鋼)/エポキシ樹脂粉体塗装 スライド用チューブ: ポリプロピレン		バスケット部 : 金属(鋼)/エポキシ樹脂粉体塗装 サイドレール部: 金属(鋼)/エポキシ樹脂粉体塗装 スライド用チューブ: ポリプロピレン	

Made in Taiwan

お問い合わせ先

製品のお問い合わせは、お買い上げの販売店もしくは下記お客様相談室までご連絡ください。

株式会社 良品計画

お客様相談室でんわ



0120-14-6404

S2Y10615

STEEL UNIT SHELF / ADDITIONAL WIRE BASKET
STAINLESS UNIT SHELF / ADDITIONAL WIRE BASKET

FOR W56 cm TYPE / W84 cm TYPE

User Guide

Thank you for your purchase.
Read this User Guide before use to ensure correct assembly and use of the product.
Please store this guide in an easily accessible place for future reference.

Table of Contents	Pages
Important Information (Safety Advice)	13 - 14
Parts	15
Part Names	15
Assembly Instructions	16 - 18
Directions for Use	19 - 21
Care Instructions	21
Specifications	22
Contact Information	22

Important Information (Safety Advice)



These instructions
must be followed.

This User Guide contains important information for safe use of this product in order to prevent harm to the user and others as well as damage to property.

Please note the following contents (indications and graphic symbols) before reading the main contents of this User Guide, and follow the instructions given.



- Explanations of Indications

The degrees of injury and damage that may arise when the product is used incorrectly are classified and explained with the following symbols.

 WARNING	Indicates a hazard with a level of risk which, if not avoided, could result in death or serious injury ^{*1} to the user.	 CAUTION	Indicates a hazard with a level of risk which, if not avoided, could result in injury ^{*2} to the user or property damage ^{*3} .
--	---	--	--

- Explanations of Graphic Symbols



Instructions are given in the form of the following graphic symbols. (Examples of graphic symbols are as follows.)



 DON'Ts: Actions that are prohibited.	 DOs: Actions that must be taken.
--	--


*1 "Serious injury" indicates blindness, injuries, burns, bone fractures, poisoning, or electric shocks which have long term effects and require hospitalisation and/or long-term hospital visits for treatment.

*2 "Injury" indicates injuries or burns which do not require hospitalisation or long-term hospital visits for treatment.

*3 "Property damage" indicates extended damage that involves the house or household property.

 WARNING	
 DON'Ts	<ul style="list-style-type: none">• Do not let children climb on or hang from the product. Otherwise this may cause tip-over, damage and/or injury.• Do not store items only in the upper section. Doing so may cause the product to lose its balance and tip over, leading to injury.• Do not place anything heavy in the upper section. It may fall off or the shelf can tip over and lead to injury in the event of an earthquake, etc.• Do not place anything exceeding the withstand load or anything only on one side even if it is within the withstand load. Doing so may cause product deformation or damage and lead to injury.• Do not leave unnecessary packaging materials within reach of small children. Children may accidentally pull them over their head, cover their mouth and/or nose and suffocate.• Do not keep the fitting parts within reach of small children and be careful not to lose them. Children may accidentally swallow small parts and choke.

 CAUTION	
 DON'Ts	<ul style="list-style-type: none">• Do not use unless fully assembled. Doing so may cause the fixed parts to come off and lead to injury.• Do not use for other than its intended purpose. Doing so may cause damage to the product, resulting in injury.• Do not use outdoors. Doing so may cause deformation or severe degradation, leading to injury.

! CAUTION	
 DOs	<ul style="list-style-type: none"> • The product must be assembled by at least two adults. Assembling alone may cause injury, tip-over, damage and/or floor scratches. • When moving the assembled product, do not drag it on the floor. It must be lifted and carried by at least two adults holding the underside of the product with both hands. This prevents the floor and other furniture from scratches. • When moving the shelf for a home move, etc., put it back into the pre-assembly state beforehand. Not doing so may cause parts to come off and lead to injury or product damage. • Do not touch the moving parts and gaps when inserting/removing the wire basket. Doing so may cause your hands or fingers to get caught and injured. • Regularly check for any looseness in all parts, and retighten them if looseness is found. This is to prevent injury and product damage. • Take out all the clothing and anything stored inside before inserting/removing the wire basket. Not doing so may cause the basket to become damaged or the contents to fall and lead to injury. • Install on a flat and stable surface. Using on an unstable surface may cause product distortion or damage. • Read the User Guide provided with the Unit Shelf (*) and be sure to use the product correctly. It contains precautions for using the assembled product, which prevent injury and ensure your safety.






* Frames, shelf boards, and cross bars individually or a set containing all of them for the Stainless Steel Unit Shelf series or Steel Unit Shelf series.

Note (Other Caution)	
	<ul style="list-style-type: none"> • To dispose of the packaging materials, follow the rules implemented by your local government. • Wear gloves during assembly of the product. This is to prevent unexpected injury.


Parts

Applies to W56 CM and W84 CM / Steel and Stainless Steel types

- * The parts list applies to both Steel and Stainless Steel types.
- * The W56 CM type is used in the illustrations.
- * Screwdriver is not included. Prepare a cross-head screwdriver of a suitable size.
(It may be difficult to assemble the product if the head of the screwdriver is too large or too small.)
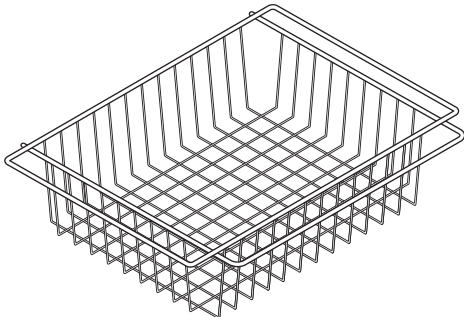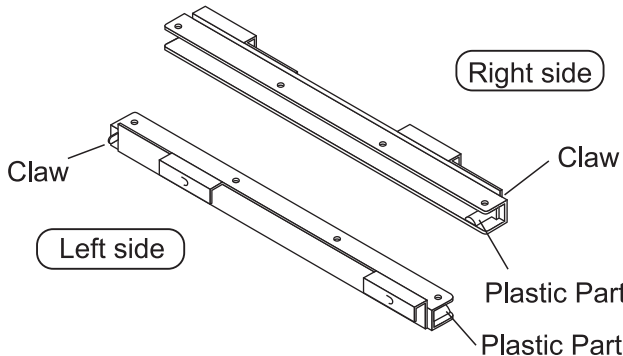
<p>Ⓐ Wire Basket × 1</p> 	<p>Ⓑ Side Rail × 2</p> 	
<h2>Fitting Parts</h2>		
<p>Ⓐ Slide Tube × 2</p> 	<p>Ⓑ Stopper Pin × 4</p> 	<p>Ⓒ Flip-up Prevention Bolt × 4 * Attached to Ⓑ side rail.</p> 

Part Names
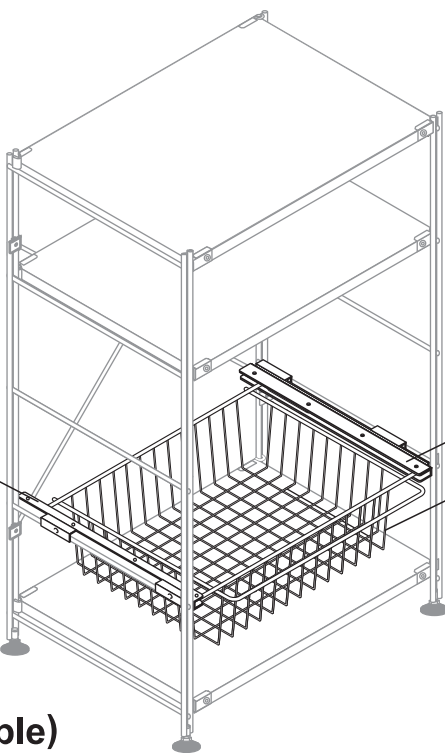
<div data-bbox="143 1332 454 1388">Combination Example</div> <p>Frame S + Steel Shelf Board (W56 cm type) + Cross Bar</p> <p>* Frames, shelf boards, and cross bars are sold separately.</p>	 <p>Ⓑ Side Rail</p> <p>Ⓐ Wire Basket</p> <p>Ⓑ Side Rail</p> <p>Ⓐ Wire Basket</p> <p>Completion Image (Example)</p>
--	---

Assembly Instructions

* The **W56 CM** type is used in the illustrations.

Applies to **W56 CM** and **W84 CM** / **Steel** and **Stainless Steel** types




- ❗ The product must be assembled by at least two adults. Assembling alone may cause injury, tip-over, damage and/or floor scratches.
- ⚠ Do not use power tools to assemble the product. Placing excessive strain on the product may cause damage and lead to injury.
- ❗ Retighten all the bolts approximately one week after assembly. They may be loose at the start of use, and continued use under this condition can lead to damage and/or injury.

* For details on how to assemble the unit shelf, read the User Guide provided with shelf set or additional frame (sold separately).

1

Remove all **Ⓒ** flip-up prevention bolts attached to **Ⓑ** side rail.
(* Removed parts are used in step **4**.)

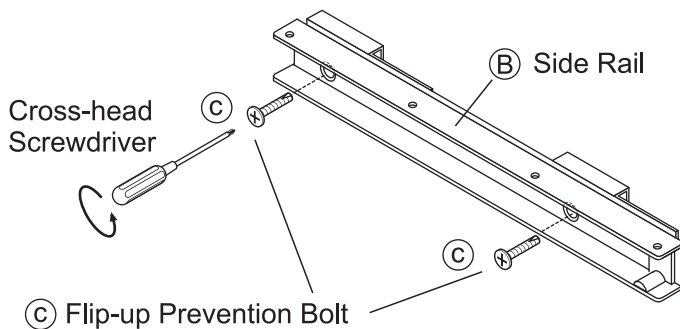


Note
(Other Caution)

Remove the shelf board first when installing the wire basket under it.

2

Place the claw of **Ⓑ** side rail on inner side of the frame. When doing so, make sure that open ends of the U-shaped channels are facing each other. Then mount hooks on **Ⓑ** side rail onto the rung. It is a little tight, so tap it lightly from above.

* The side rail has left and right orientation. Refer to the illustrations below to tell them apart.

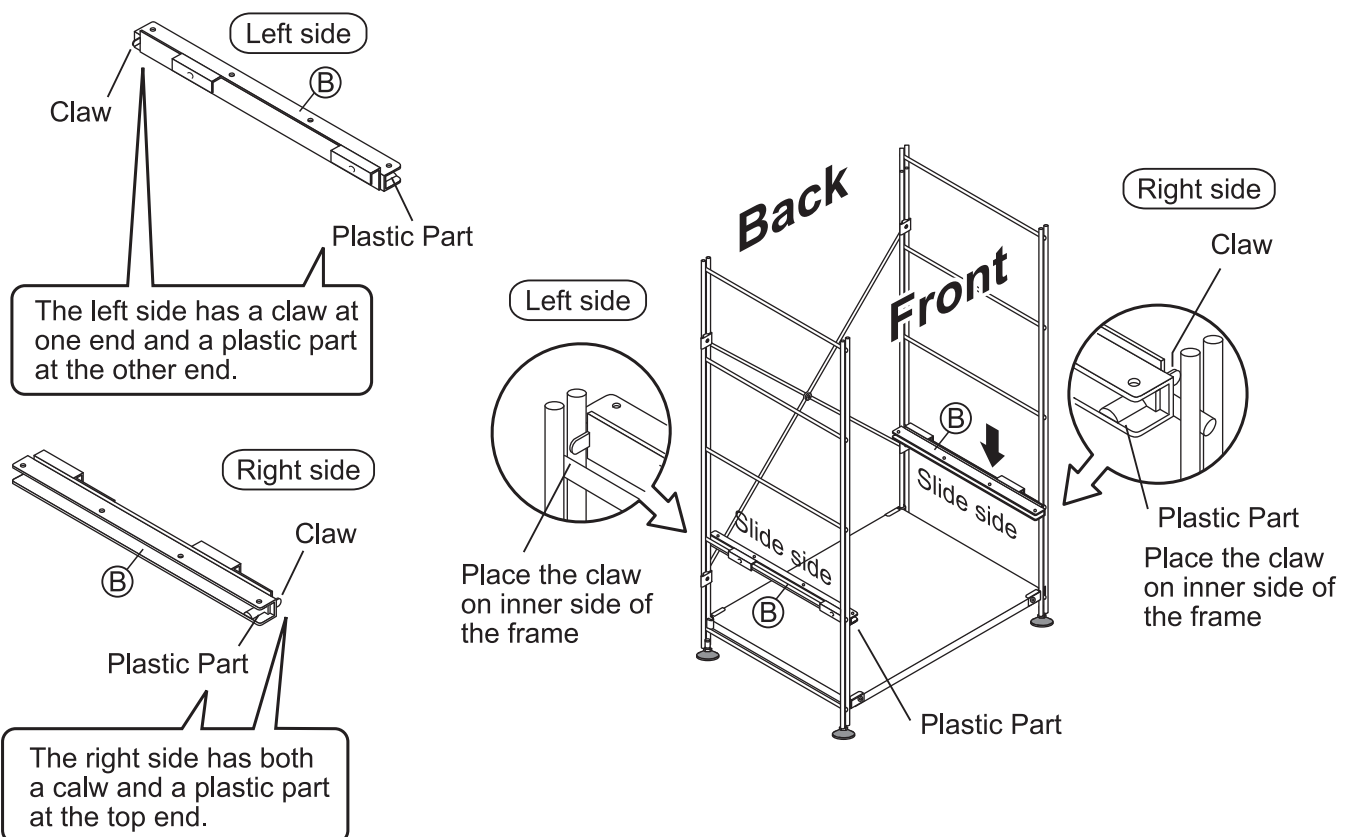


Assembly Instructions (Continued)

* The **W56 CM** type is used in the illustrations.


Applies to **W56 CM** and **W84 CM** / **Steel** and **Stainless Steel** types

3

Attach (a) slide tubes to (A) wire basket in positions shown in the illustration below.

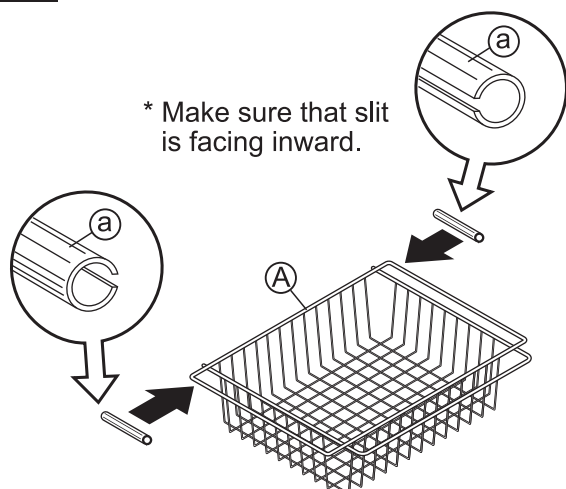

* Be sure to attach (a) slide tubes at the back side of both slide sides of (A) basket frame.

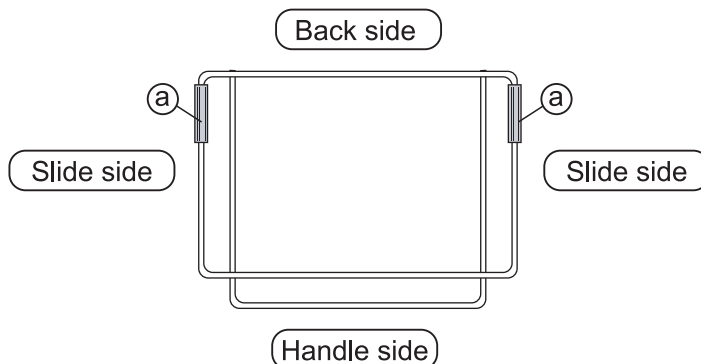


Note (Other Caution)


(a) Slide tube stiffens in low temperature environment and may crack during the procedure. Leave it in room temperature for approximately 30 minutes before attaching it.

4

Attach (c) flip-up prevention bolts removed in step 1 to (B) side rail mounted onto the rung of the frame.

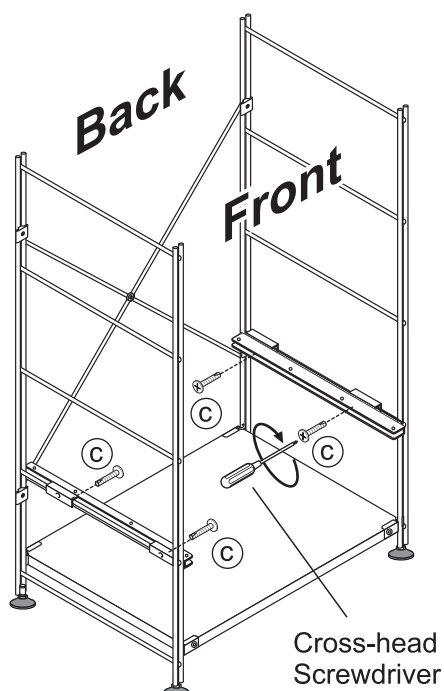

Attachment Position of Flip-up Prevention Bolts

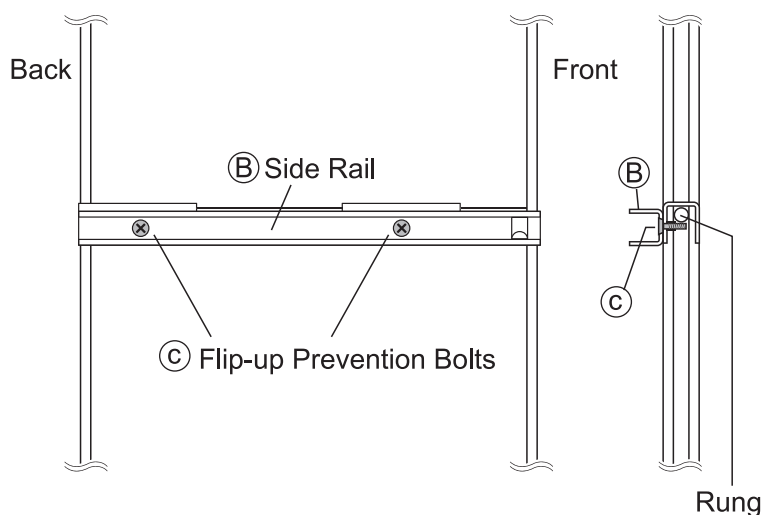

CAUTION

! Fully screw (c) flip-up prevention bolts in until they do not protrude from (B) side rail. Failure to do so may cause difficulty in inserting/removing the basket.


Assembly Instructions (Continued)

* The **W56 CM** type is used in the illustrations.


Applies to **W56 CM** and **W84 CM** / **Steel** and **Stainless Steel** types

5

Put (b) stopper pin in the farthest hole of both left and right (B) side rails. Then, insert (A) wire basket assembled in **3**.

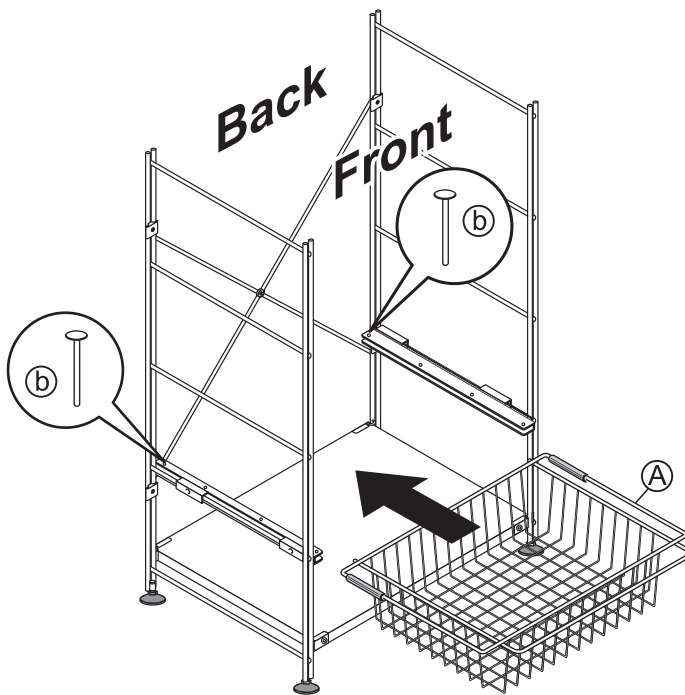


Attachment Position of Stopper Pin

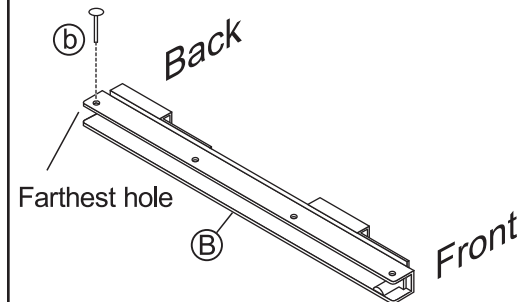


6

After setting the wire basket, put (b) stopper pin in the third hole from the far side of both left and right (B) side rails. Attach the shelf boards as necessary.

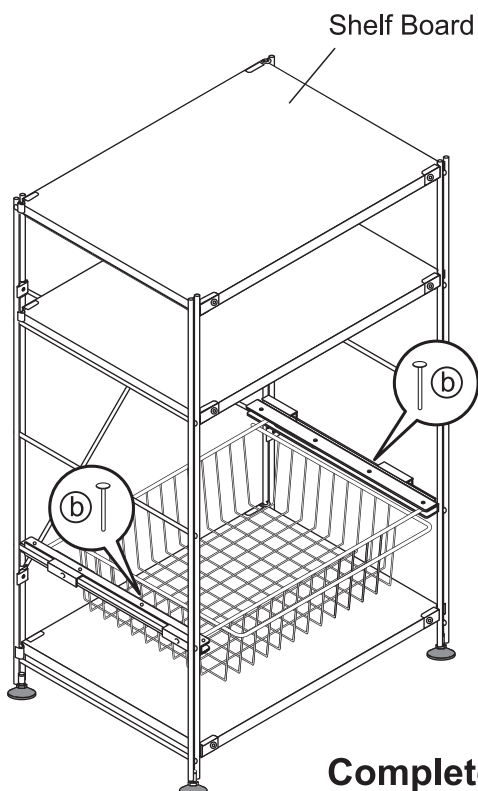

Attachment Position of Stopper Pin

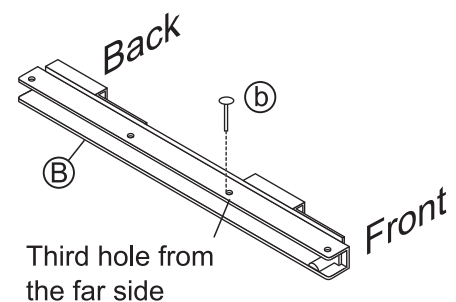

Completed (Usage example)

Directions for Use


* The **W56 CM** type is used in the illustrations.

Applies to **W56 CM** and **W84 CM** / **Steel** and **Stainless Steel** types


Note (Other Caution)

How to Insert the Wire Basket

- ① Push the left and right frames out as depicted below and insert the wire basket on the side rails. At that time, make sure to hold the areas with the slide tubes attached to prevent displacement or removal of them.

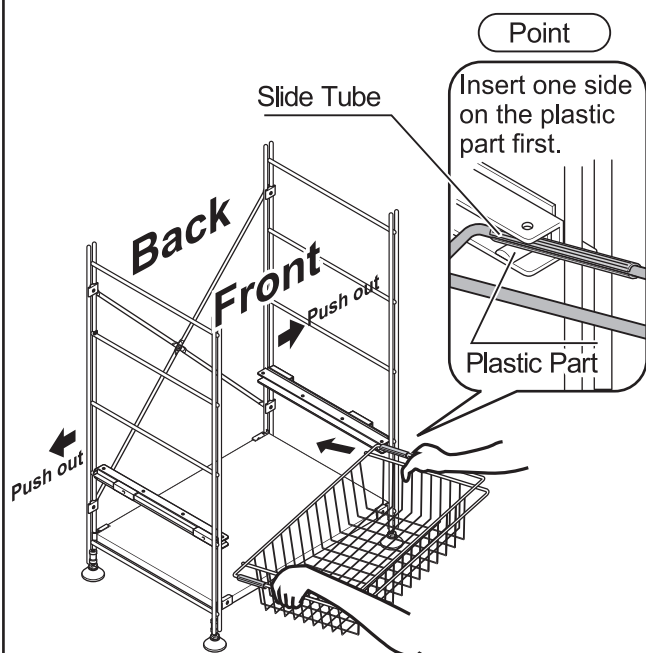


- ② As depicted below, hold the areas with the slide tubes attached with hands. Slightly warp the outer wires inward, and insert the wire basket pushing left and right sides alternately.

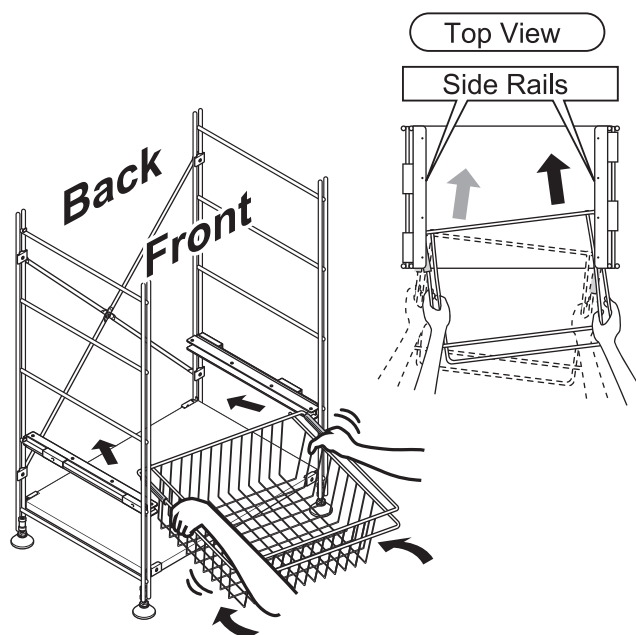

* If inserting the basket as depicted above is hard, loosen all shelf board hooks, and follow steps ① and ②.


How to Remove the Wire Basket

- ① Remove the stopper pins on front side.

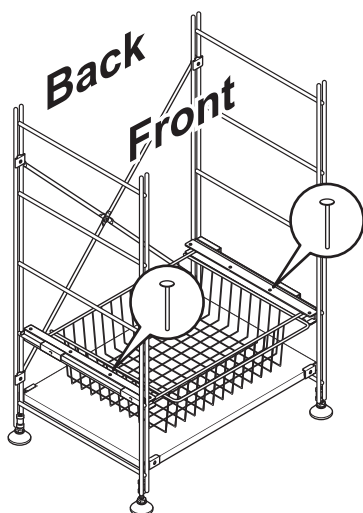

* When removing the wire basket, follow the illustrations below.

- ② Hold the frames with hands. Slightly warp the outer wires inward, and pull out the wire basket pulling left and right sides alternately.

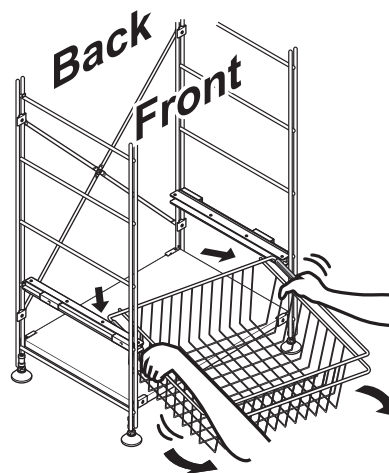

Directions for Use (Continued)


* The W56 CM type is used in the illustrations.

Applies to W56 CM and W84 CM / Steel and Stainless Steel types

Note (Other Caution)


Assembly Precautions

- If (A) wire basket does not move smoothly, adjust the hook positions by taking following steps.

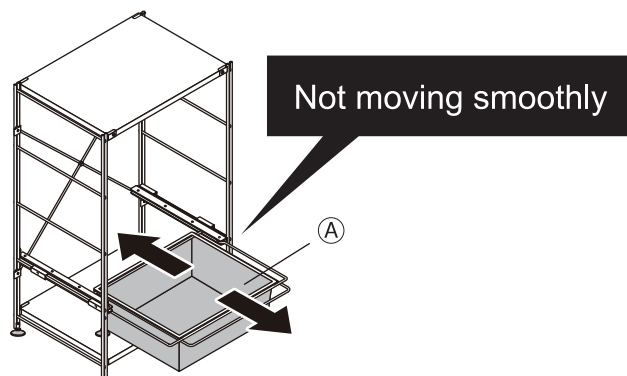


How to Adjust the Hook Positions

- 1 Loosen all the bolts fastening the hooks on the shelf board in order from top to bottom.

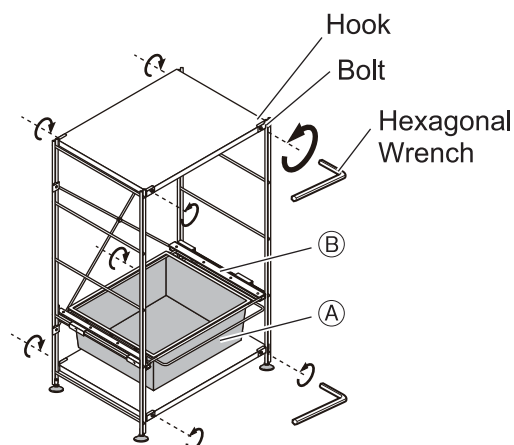

- 2 Adjust the hook positions while checking the overall balance. Once the positions that allow (A) wire basket to move smoothly are found, retighten the bolts.

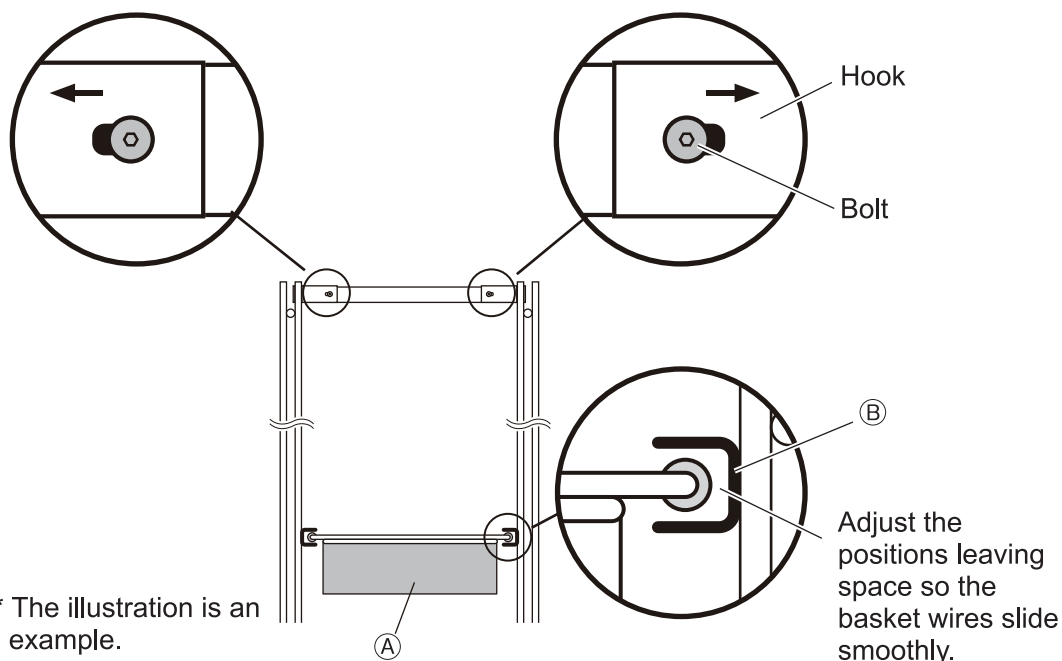


* The illustration is an example.

Directions for Use (Continued)

[Moving the Product]


<Moving When Fully Assembled>

- Do not lift the shelf board(s) with anything placed on top. Otherwise this may cause injury and/or damage to the stored items.
- When moving the product, remove all stored items and be sure to move it with at least two adults. Moving it alone may cause damage or injury.
- Do not push or drag the product across the floor. Doing so may cause floor scratches and/or product damage.

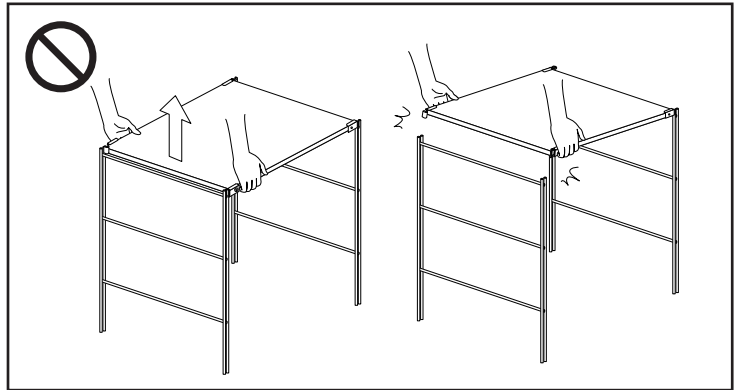

<Moving for a Home Move, etc.>

- When moving the product, put it back into the pre-assembly state beforehand. Not doing so may cause injury, product damage or scratches on the floor.

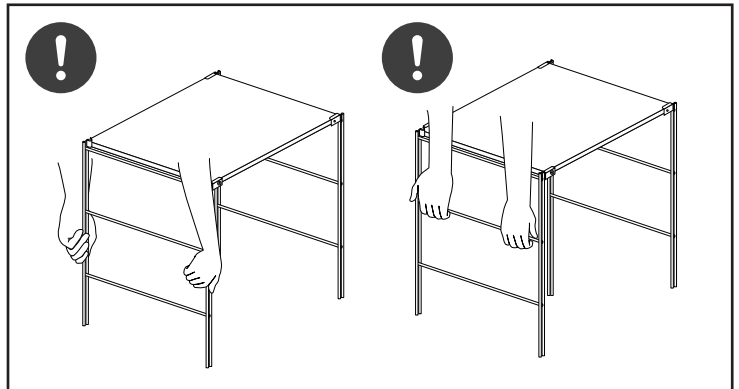

Disposal

- To dispose of the product, follow the rules implemented by your local government.

Care Instructions

Maintenance and Inspection

- Do not use if damaged or deformed. Doing so reduces the strength of the product and may lead to injury.
- Regularly check for any looseness or wobbling in the connecting parts, and retighten them if any looseness is found. This is to prevent injury, product damage and floor scratches.

Maintenance for Metal Parts

- For regular cleaning, wipe with a soft, dry cloth. Remove dust with a brush or a vacuum cleaner (at low setting).
- If the product is heavily soiled, clean it with a cloth soaked in 3-5% neutral detergent solution and wipe off any detergent residue with a damp cloth. Then gently wipe with a dry cloth and let the product dry naturally.

Specifications

Product Names	STAINLESS STEEL UNIT SHELF / ADDITIONAL WIRE BASKET		STEEL UNIT SHELF / ADDITIONAL WIRE BASKET / LIGHT GREY	
Specification	FOR W84 cm TYPE	FOR W56 cm TYPE	FOR W84 cm TYPE	FOR W56 cm TYPE
JAN	4550182141221	4550182141238	4550182141245	4550182141252
Product Dimensions	W790 × D410 × H143 mm	W510 × D410 × H143 mm	W790 × D410 × H143 mm	W510 × D410 × H143 mm
Product Weights	Approx. 3 kg	Approx. 2 kg	Approx. 3 kg	Approx. 2 kg
Usage	Optional parts for Stainless Steel Unit Shelf / Steel Unit Shelf			
Load Capacity	Approx. 5 kg			
Materials	Basket : Metal (Stainless Steel), Electropolishing Side Rail : Metal (Steel), Epoxy Resin Powder Coating Slide Tube : Polypropylene		Basket : Metal (Steel), Epoxy Resin Powder Coating Side Rail : Metal (Steel), Epoxy Resin Powder Coating Slide Tube : Polypropylene	

Made in Taiwan

Contact Information

For inquiries regarding the product, please contact the store where you bought it.

S1Y181225